




serie **EUROBLOCK**

Art. **100000**

**BREVETTATO
PATENTED**



-  Valvola di ritegno a passaggio totale, filettatura F/F.
-  Full bore check valve, F/F threaded.
-  Clapet anti retour, à passage total, taraudée F/F.
-  Rückschlagventil mit vollem Durchgang, beiderseits Innengewinde.
-  Válvula de retención a paso total, roscas hembra/hembra.

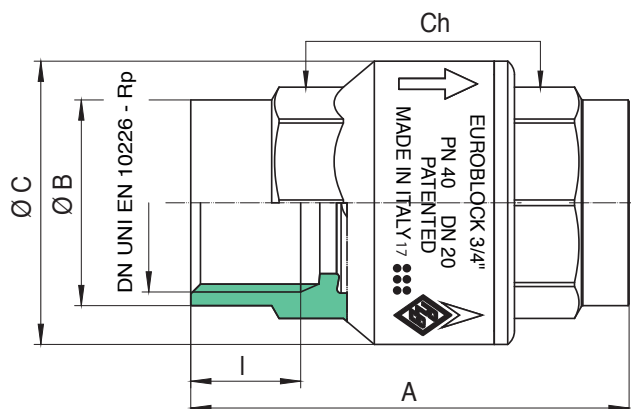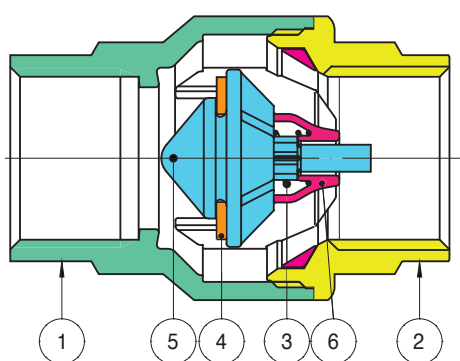

POS.	DENOMINAZIONE	PART NAME	DESCRIPTION	TEILBENENNUNG	DENOMINACIÓN	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	CORPO	BODY	CORPS	GEHÄUSE	CUERPO	BRASS CW617N UNI EN12420	1
2	MANICOTTO	END CONNECTION	MANCHON	MUFFE	MANGUITO	BRASS CW617N UNI EN12420	1
3	MOLLA	SPRING	RESSORT	FEDER	MUELLE	STEEL AISI 303	1
4	GUARNIZIONE PIANA	FLAT SEAT	JOINT OLAT	FLACHE DICHTUNG	ASIENTO PLANO	NBR	1
5	OTTURATORE	OBSTRUCTOR	OBTURATEUR	SCHIEBER	OBTURADOR	FORTRON (POLYPHENYLENE SULFIDE)	1
6	SUPPORTO	SUPPORT	SUPPORT	LAGER	SOPORTE	POM	1

MISURA SIZE	DN	BOX	MASTER BOX	CODICE CODE	I	Ch	ØB	ØC	A	Kv	PN	Kg
3/8"	10	20	160	10000003	11,4	21	20	27	47	1,8	40	0,08
1/2"	15	15	120	10000004	15	26	25	34,5	59	7,9	40	0,14
3/4"	20	10	80	10000005	16,3	32	31	42	65	13	40	0,21
1"	25	10	40	10000006	19,1	39	38	49	75	19	25	0,33
1"1/4	32	6	24	10000007	21,4	49	48	61	83,5	29,5	25	0,55
1"1/2	40	4	16	10000008	21,4	55	54	73	89	44,6	16	0,76
2"	50	2	8	10000010	25,7	68	67	87,5	101,5	61,3	16	1,15
2"1/2	65	2	4	10000012	30,2	83	83	111,5	121	77,5	12	2,13
3"	80	2	4	10000014	33,3	98	98	133	136	121,9	12	3,30
4"	100	-	2	10000018	39,3	128	127	163	159	189,8	10	5,85

Limiti di temperatura: -20°C +100°C - Temperature range: -20°C +100°C

Disponibile accessorio, art. 110100, a pag. 311 - The accessory, item 110100, is available. See at page 311.